

# INCREASE SAFETY AT YOUR LOADING DOCK

**python**  
STR 609

EXCLUSIVE  
"ALL WEATHER"  
HOOK POSITION SENSOR  
ELIMINATES LIMIT  
SWITCHES & COSTLY  
ADJUSTMENTS



DC GEAR MOTOR  
IP-44 RATED  
PROTECTS MOTOR FROM  
WATER SPRAY IN ANY DIRECTION

ZINC PLATED FINISH  
PROTECTS AGAINST THE  
HARSHEST  
WEATHER CONDITIONS

RESTRAINING FORCE OF  
32,000 LBS (14,514 KGS)

ENVIRONMENTALLY-FRIENDLY,  
SUSTAINABLE ALTERNATIVE  
TO HYDRAULIC SYSTEMS

## PYTHON STR-609 TRUCK RESTRAINT

As one of Affiliated Force's premium dock products, the Affiliated Force Truck Restraint is designed for safety and reducing the risk of dock accidents. With a high-visibility hook-style restraint arm, it is the ideal solution for keeping workers, equipment, and cargo safer during loading and unloading. Also a cost-effective alternative to hydraulic truck restraints, its rugged design makes it virtually maintenance-free with the ability to function in the toughest environments. The unique rotating hook engages over the impact guard using a restraining force of 32,000 lbs (14,514 kgs). You can rely on the dependability of this truck restraint and worry less about the direct and indirect costs of an industrial accident.

**AFFILIATED FORCE**  
INC.




# PYTHON STR-609

New Features In An Industry Proven Design

## Benefits/Features:

- NO MECHANICAL LIMIT SWITCHES. Hook position constantly monitored by means of reliable, waterproof magnetic encoder.
- Pulse Width Modulation Motor Control increases life of motor and mechanical parts suffer less impact damage due to integrated Soft Start/Soft Stop.
- Restraint Hook maintains contact with ICC Bar and automatically adjusts with trailer motion.

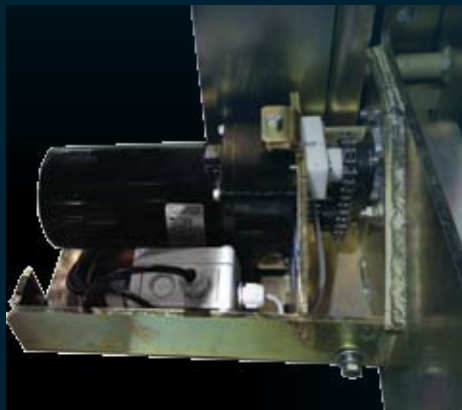

- Inside & outside Red & Green LED Lights provide safe, clear status of restraint position to Truck Drivers & Loading Dock Personnel.
- Easy installation, unit mounts to dock above ground level.
- Low profile 9" carriage, works with all standard trailers and an impact extension bar with a service range of 9" to 25".
- Mounting force in excess of 100,000 lbs
- Dock Leveler interlock capability



- Zinc plating for all-weather durability. IP-44 RATED DC Gear Motor; protects motor from dirt & water spray.
- Low power consumption, saving on energy costs.
- Easy push button operation with audible alarm override and flashing LED light
- Programmable display (English/French)
- Status Indication, updates and system monitoring at a glance
- Sensor alerts operator if rear impact guard is NOT detected
- Standard 120 Volt (1 phase)
- Available in all Voltages: 220 Volt (1 phase), 230 Volt, 460 & 575 Volt (3 phase) Optional voltage available.

Combo Panel



Standard Panel



DEALER IMPRINT

\*\* All Affiliated Force products are subject to design modifications without notice. Product may be shown with non-standard options.